




High Quality Transformers

SA 型電源トランス標準寸法表

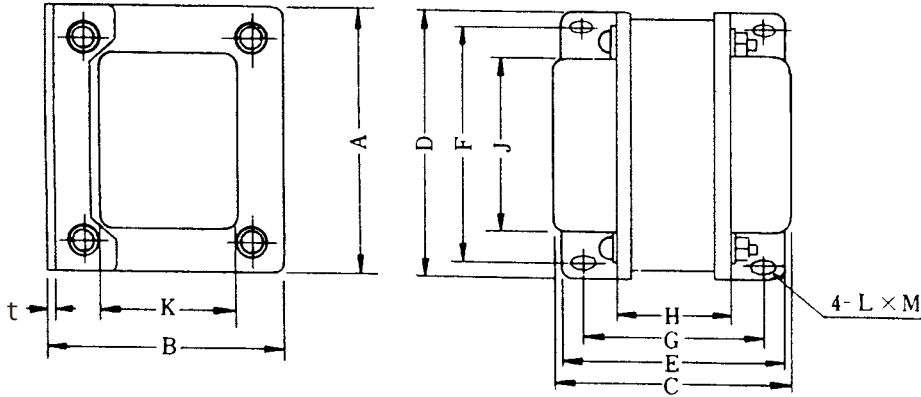

Type	A ⁺³ ₋₅	B ⁺³ ₋₅	C ⁺⁵ ₋₁₀	D±1	E±3	F±1	G±2	H±3	J±5	K±5	L±0.5 × M±0.5	t	標準電力 (VA)	約 ε%
SA7630	83.0	70.0	72.0	79.0	69.0	70.0	56.0	32.0	52.0	40.0	4.8×6.8	1.0	46	9.5
SA7635	83.0	70.0	77.0	79.0	74.0	70.0	61.0	37.0	52.0	40.0	4.8×6.8	1.0	51	8.5
SA7640	83.0	70.0	82.0	79.0	79.0	70.0	66.0	42.0	52.0	40.0	4.8×6.8	1.0	56	8.0
SA7650	83.0	70.0	92.0	79.0	89.0	70.0	76.0	52.0	52.0	40.0	4.8×6.8	1.0	70	7.2
SA8530	93.0	80.0	75.0	88.5	69.0	80.0	56.0	32.0	58.0	43.0	4.8×6.8	1.0	71	7.3
SA8540	93.0	80.0	85.0	88.5	79.0	80.0	66.0	42.0	58.0	43.0	4.8×6.8	1.0	88	6.4
SA8550	93.0	80.0	95.0	88.5	89.0	80.0	76.0	52.0	58.0	43.0	4.8×6.8	1.0	104	5.5
SA8560	93.0	80.0	105.0	88.5	99.0	80.0	86.0	62.0	58.0	43.0	4.8×6.8	1.0	125	5.1
SA9640	103.0	87.0	90.0	99.0	79.0	85.0	66.0	42.0	66.0	48.0	4.8×6.8	1.6	109	6.3
SA9650	103.0	87.0	100.0	99.0	89.0	85.0	76.0	52.0	66.0	48.0	4.8×6.8	1.6	136	5.5
SA9660	103.0	87.0	110.0	99.0	99.0	85.0	86.0	62.0	66.0	48.0	4.8×6.8	1.6	146	4.9
SA10540	112.0	95.0	94.0	108.0	92.0	95.0	72.0	42.0	71.0	53.0	6.0×9.0	1.6	137	5.9
SA10550	112.0	95.0	104.0	108.0	102.0	95.0	82.0	52.0	71.0	53.0	6.0×9.0	1.6	159	4.8
SA10560	112.0	95.0	114.0	108.0	112.0	95.0	92.0	62.0	71.0	53.0	6.0×9.0	1.6	183	4.6
SA11450	121.0	103.0	109.0	117.0	102.0	105.0	82.0	52.0	77.0	58.0	6.0×9.0	2.0	195	4.4
SA11460	121.0	103.0	119.0	117.0	112.0	105.0	92.0	62.0	77.0	58.0	6.0×9.0	2.0	223	4.2
SA11470	121.0	103.0	129.0	117.0	122.0	105.0	102.0	72.0	77.0	58.0	6.0×9.0	2.0	260	3.9
SA13350	140.0	122.0	119.0	136.0	102.0	125.0	82.0	52.0	90.0	68.0	6.0×9.0	2.0	309	4.6
SA13360	140.0	122.0	129.0	136.0	112.0	125.0	92.0	62.0	90.0	68.0	6.0×9.0	2.0	372	4.1
SA13370	140.0	122.0	139.0	136.0	122.0	125.0	102.0	72.0	90.0	68.0	6.0×9.0	2.0	430	3.1

NOTE : Above values are based on 2 windings and 1.5kV withstand voltage.