




High Quality Transformers


28M ~ 28MK シリーズ

- 1) 小型・軽量固定ピンタイプです。
- 2) 最大入力レベル +18 dBm(at 300 Hz)
- 3) 周波数範囲 0.1 ~ 20 KHz
- 4) インピーダンス偏差 ±30 % at 1KHz 1V
- 5) 絶縁耐圧 p:s 間 500 VAC 1 分間
- 6) 絶縁抵抗 p:s 間 500 VDC 100 MΩ 以上
- 7) 1 次手前にして品番標示
- 8) 下記を目安に特注品承りますのでご注文下さい。

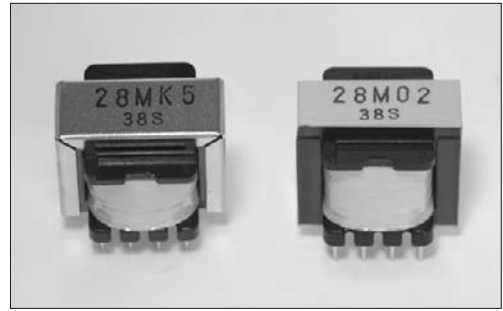


品番	インピーダンス (Ω)		直流抵抗		直流重畳	巻数比 P:S	接続図	測定レベル	試作時実測参考データ (Ω/dB)													
	1次	2次	1次	2次					30	50(60)	0.1	0.2	0.3	1	3	6	10	15	20	30	50	70KHz
28M01	C.T 600Ω	600Ω	31Ω	31Ω	0	1:1	(A)	0.8V	580	600	623	637	642	650	658	671	701	753	819	993	1440	
28M02	C.T 600Ω	3KΩ	31	155	0	1:2.235	(A)	0.8V	578	603	623	638	643	648	656	667	691	735	792	933	1340	
								0.8V	1.02	0.87	0.72	0.62	0.57	0.52	0.52	0.57	0.57	0.77	0.92	1.37	2.67	
28M03	C.T 3KΩ	10KΩ	146	650	0	0.547:1	(A)	1.8V	2910	3030	3150	3200	3230	3270	3290	3320	3390	3500	3680	4200	6290	
								1.8V	1.03	0.88	0.73	0.68	0.63	0.58	0.58	0.58	0.63	0.73	1.03	2.38		
28M04	600Ω	C.T 600Ω	30	36	5mA	1:1	(C)	2V	398	492	544	588	604	630	644	656	670	709	750	858Ω		
								2V	2.4	1.6	1.3	1.0	0.9	0.75	0.70	0.70	0.70	0.75	0.85	1.15dB		
28M07	600Ω /5KΩ	600Ω /5KΩ	51	64	0	1:1	(D)	1V			3910	4230	4370	4640	4790	4890	5000	5185	5370Ω			
								1V			1.25	0.95	0.80	0.55	0.40	0.35	0.35	0.35	0.35dB			
28M08	20KΩ /50KΩ	20KΩ /50KΩ	746	693	0	1:1	(D)	1V			36.2	41.5	43.6	47.1	47.8	46.1	44.6	37.1	29.7KΩ			
								1V			1.65	1.2	1.0	0.75	0.75	1.25	2.25	3.5	4.6dB			
28M11	420Ω	6Ω	32	0.52	55mA	1:0.124	(E)	1V			286	372	401	439	452	469	503	563	633Ω			
								0.3V			2.25	1.3	1.15	0.95	0.85	0.90	1.0	1.35	1.65dB			
28M12B	700Ω	C.T 100Ω	41	3.8	0	1:0.378	(C)	1V			714	731	738	750	758	768	792	834	890	1026Ω		
								1V			0.60	0.60	0.60	0.50	0.50	0.50	0.55	0.65	0.80	1.1dB		
28M12G	700Ω	C.T 100Ω	41	3.8	0	1:0.378	(C)	1V			676	697	706	726	742	757	787	832	896	1043Ω		
								1V			0.90	0.80	0.75	0.65	0.60	0.55	0.65	0.75	0.90	1.3dB		
28M13G	600Ω	C.T 600Ω	23	29	0	1:1	(C)	1V	491	540	566	587	595	616	629	642	660	691	730	829Ω		
								1V	1.45	1.15	1.0	0.85	0.80	0.65	0.60	0.55	0.60	0.65	0.80	1.15dB		
28M13B	600Ω	C.T 600Ω	23	29	0	1:1	(C)	1V	564	591	606	620	627	637	643	653	670	703	746	852Ω		
								1V	1.0	0.8	0.70	0.60	0.55	0.50	0.45	0.45	0.50	0.60	0.75	1.10dB		
									(60Hz)													
28MK1	1KΩ	600Ω	49	14 15	0	2.57:1 2.57:1	(B)	1.0V	820	923	970	1003	1015	1040	1060	1068	1078	1088	1100	1127	1207	1337
								1.0V	1.49	1.09	0.99	0.84	0.79	0.69	0.64	0.59	0.54	0.54	0.54	0.59	0.59	0.64
28MK2	1KΩ	600Ω	38	10 11	0	2.58:1 2.58:1	(B)	1.0V	910	960	990	1020	1030	1050	1060	1065	1065	1075	1085	1130	1155	1250
								1.0V	0.99	0.79	0.69	0.59	0.54	0.44	0.39	0.39	0.39	0.39	0.39	0.39	0.39	0.44
28MK3	1.2KΩ	600Ω	55	15 16	0	2.82:1 2.82:1	(B)	1.0V	1000	1115	1165	1205	1225	1255	1275	1290	1300	1320	1335	1390	1530	1760
								1.0V	1.15	1.10	0.95	0.80	0.75	0.70	0.60	0.55	0.50	0.50	0.50	0.60	0.70	0.80
28MK4	1.2KΩ	600Ω	42	10 11	0	2.83:1 2.83:1	(B)	1.0V	1080	1140	1180	1210	1230	1250	1260	1270	1280	1290	1300	1320	1390	1510
								1.0V	1.00	0.80	0.70	0.60	0.50	0.45	0.40	0.40	0.40	0.35	0.40	0.35	0.40	0.50
28MK5	1.5KΩ	600Ω	70	15 16	0	3.14:1 3.14:1	(B)	1.0V	1220	1370	1440	1490	1510	1550	1580	1600	1620	1640	1660	1710	1860	2120
								1.0V	1.53	1.08	0.93	0.83	0.73	0.63	0.58	0.53	0.53	0.53	0.53	0.53	0.58	0.73
28MK6	1.5KΩ	600Ω	53	10 11	0	3.16:1 3.16:1	(B)	1.0V	1430	1470	1500	1530	1540	1570	1590	1600	1600	1610	1625	1655	1740	1880
								1.0V	1.03	0.83	0.68	0.58	0.53	0.43	0.43	0.38	0.38	0.38	0.38	0.38	0.43	0.48

28M 外形図



28MK 外形図



接続図

