




High Quality Transformers

A66-57K8SA 真空管アンプ用 シングル出カトランス

部品 No.	インピーダンス(Ω)		出力 50 Hz MAX 5 W	Bm 50 Hz 4.4K	許容 DC 電流 MAX DC = 65 mA	周波数特性 60 Hz ~ 60 KHz $\pm 6\text{dB(DC=65mA)}$	概略寸法 FVC 6635 L 75 x 82 x 71 H	重量 約 1090(g)
	Pri.	Sec.						
A66-57K8SA	5K - 7K	8						

特性は一例です。製品にはバラツキがあります。

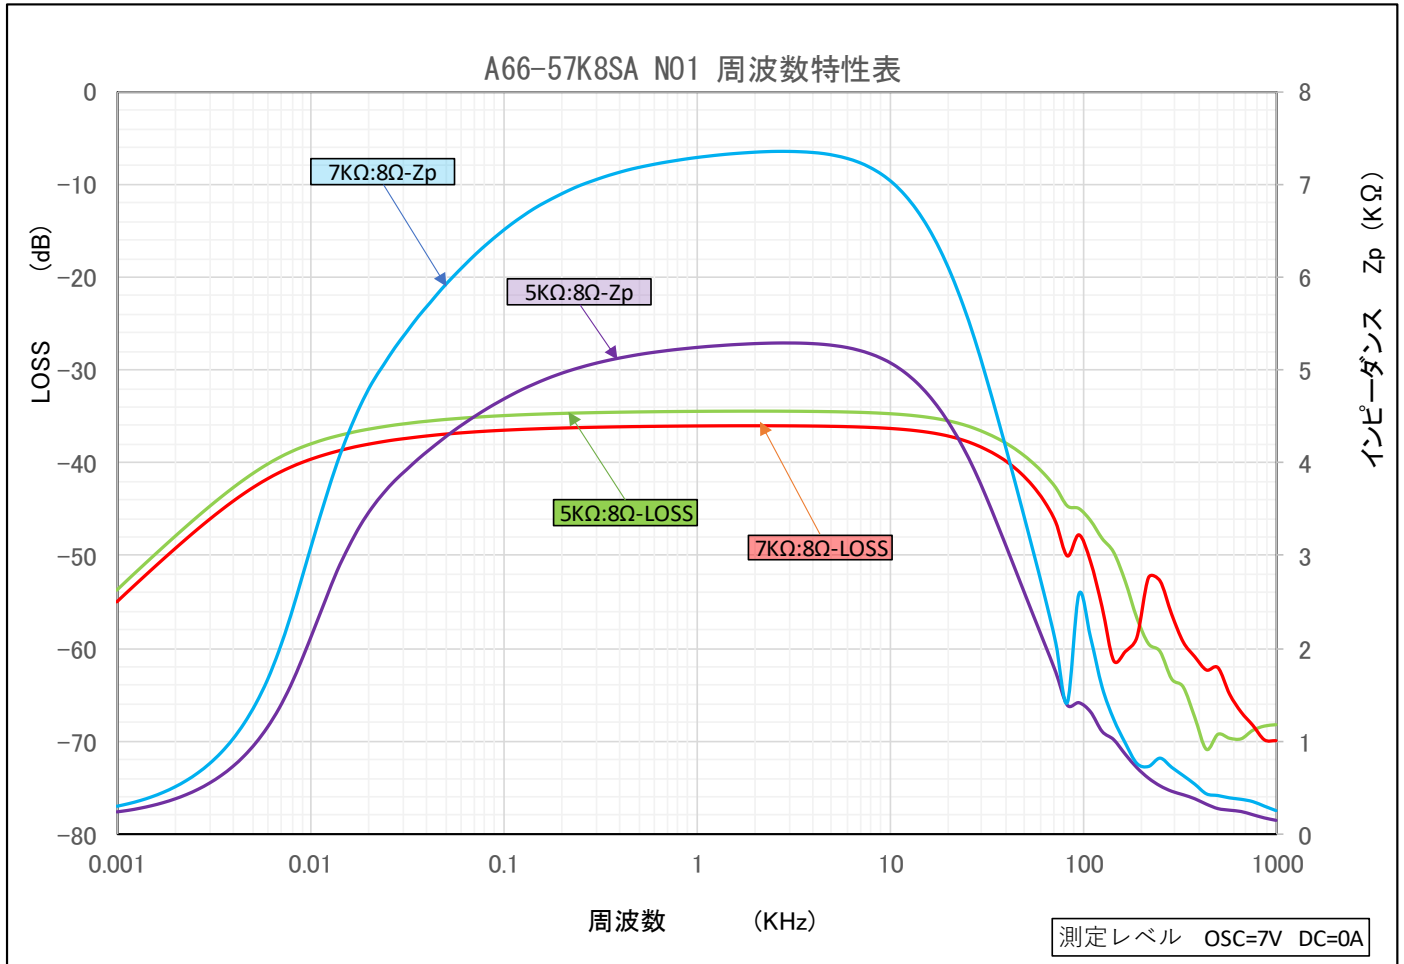

1 一次インダクタンス (1-2) / (1-3) \approx 14/18 H (100Hz 5V DC=65mA)

2 一次DCR \approx 162 / 193 Ω 二次DCR \approx 0.63 Ω

3 一次許容DC \approx 65 mA MAX

4 直流印加時の ωL データ

	(1-2) / (1-3) 100 Hz 5V \approx ωL									
DC	0	0	20	40	60	65	70	80		mA
$\omega L1$	13.2	12.9	9.9	9.4	9.1	8.9	8.5	8.1		K Ω
L1	21.0	20.5	15.7	14.9	14.4	14.1	13.5	12.8		H
$\omega L2$	18.1	17.6	13.6	12.8	11.9	11.4	10.8	8.9		K Ω
L2	28.8	28.0	21.6	20.3	18.9	18.1	17.1	13.8		H

外形寸法図

