



High Quality Transformers

KL100-1.4/0.35 H 0.7/1.4 A チョークコイル

部品 No.	測定条件 100Hz 5 V	インダクタンス	磁束密度 50 Hz 100/50 V	許容 DCA	直流抵抗	概略寸法	重量
KL100-1.4/0.35H 0.7/1.4A	(1-2-3-4) DC0.7A	直列 L ≒ 1.4 H	4.38 K	(1-2-3-4)0.7A MAX	(1-2-3-4) ≒ 13 Ω	D ケース 80 x 85 x 120	約 2790 g
	(1-2)(3-4) DC1.4A	並列 L ≒ 0.35 H		(1-2)(3-4)1.4A MAX	(1-2)(3-4) ≒ 3.2 Ω		

* 定格内での御利用をお願い申し上げます。



- 1 インダクタンス (1-2-3-4) 100Hz 5V DC=0.7A にて ≒ 1.4 H 2 直列抵抗 (1-2-3-4) ≒ 13 Ω
 (1-2)(3-4)並列 100Hz 5V DC=1.4A にて ≒ 0.35 H (1-2)(3-4) ≒ 3.2 Ω

3 (1-2-3-4) / (1-2)(3-4) 100Hz 5V ωL

		DC	0	0.1	0.2	0.4	0.6	0.70	0.80	1.0	1.2	1.4	1.6	1.8
(1-2-3-4) 直列	ωL		1258	1078	1058	1010	980	960	925	638				
	L		1.98	1.69	1.66	1.58	1.53	1.5	1.45	0.99				
(1-2)(3-4) 並列	ωL		323		271	267	265		263	255	247	240	210	176
	L		0.509		0.426	0.42	0.417		0.413	0.401	0.388	0.377	0.329	0.275

A
Ω
H
Ω
H

接続図

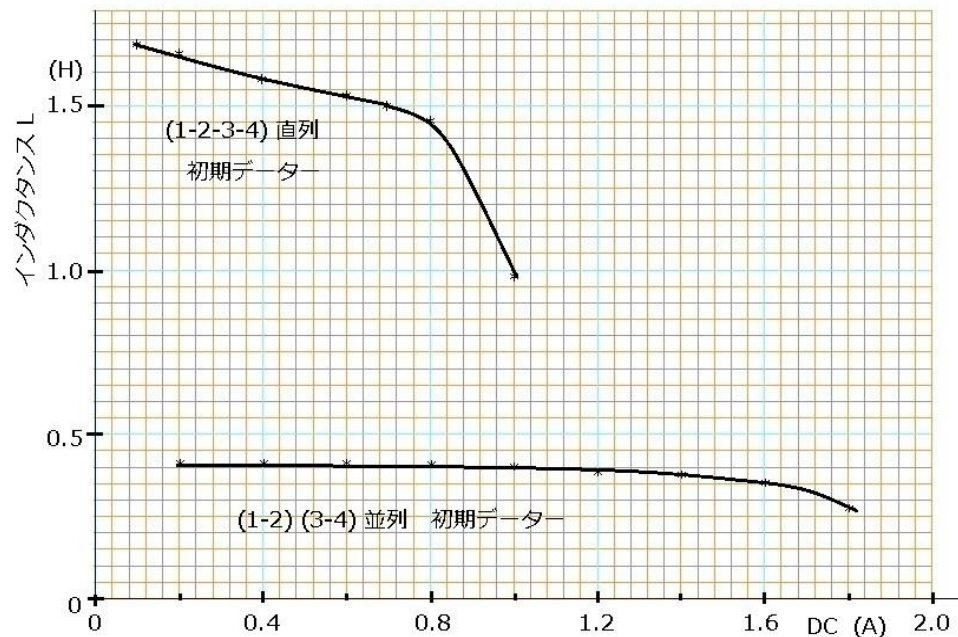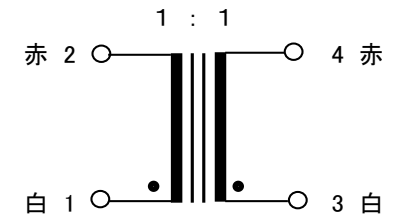

外形寸法図

